

# Rockfon Blanka® Bas



# Rockfon Blanka® Bas




- Ideal for areas requiring sound reflection to promote speech intelligibility and sound amplification such as in Music / music practice rooms, / specific localised areas within Lecture Theatres and conference rooms etc.
- Smooth, deep matt, super white surface providing visual continuity with entire Rockfon Blanka product range
- High light reflection and light diffusion, which contributes to energy savings and a bright and comfortable indoor environment
- The enhanced surface durability makes Rockfon Blanka Bas more resistant to dirt and everyday wear and tear, extending the product lifetime
- A-edge tile in basic range of dimensions

## Product Description

- Stone wool tile
- Visible side: smooth, deep matt, super white painted fleece/aluminium composite
- Rear side: back fleece
- Durable painted edges

## Application Areas

- Office
- Education
- Leisure

Edges	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A15	600 x 600 x 20	3.4	50 / 100	Rockfon® System T15 A	38%	Silver	3.4	4.37
			50 / 100	Rockfon® System T15 A, E ECR				
 A24	600 x 600 x 20	3.4	50 / 100	Rockfon® System T24 A	38%	Silver	3.4	4.37
	1200 x 600 x 20		50 / 100	Rockfon® System T24 A, E ECR				
			50 / 100	Rockfon® System T24 A				
			50 / 100	Rockfon® System T24 A, E ECR				

MS - Minimum Suspension


\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](https://rockfon.link/uk-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0.25 (Class E)

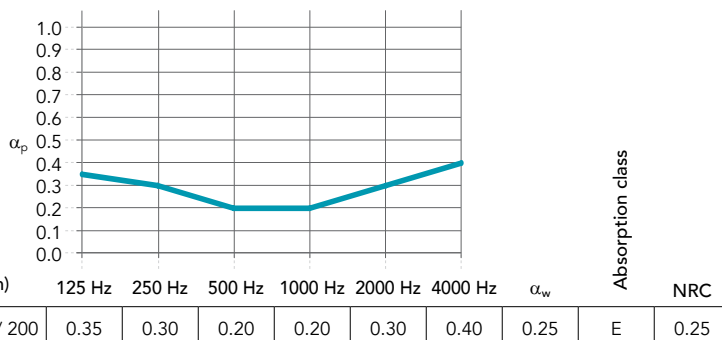

**Reaction to fire**  
 A2-s1,d0



**Light reflection**  
 87% light reflection  
 >99% light diffusion



**Visual appearance**  
 Super white surface  
 L value: 94.5  
*The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).*

Deep matt surface, perfect in critical side-light  
 Gloss: 0.8 gloss unit at 85° angle  
*The gloss of the product is tested in accordance with ISO 2813.*



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum  
 - Damp cloth



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Surface durability**  
 Enhanced durability and dirt resistance.  
 Wet-scrub resistance: Class 4  
*The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.*



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

# Sounds Beautiful

