

Rockfon Blanka® dB 35



Rockfon Blanka® dB 35





- Combines room to room sound insulation as well as good sound absorption for a flexible office layout where confidentiality is not an issue
- Made from a 25mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room to room
- A smooth, deep matt, super white surface finish with enhanced durability making it more resistant to dirt and everyday wear and tear
- Basic range of formats in semi-concealed and visible grid options
- Light in weight, sound insulating tile, easy to install and cut, cleaned with a vacuum or damp cloth

Product Description

- Stone wool tile
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: high performance membrane
- Durable painted edges

Application Areas

- Office
- Healthcare
- Education

| Edges | Module size (mm) | Weight (kg/m ²) | MS / MS Easy Access (mm) | Recommended installation System | Recycled Content |  Full Scope - V 4.0 | A1-A3 Production stage impact (kg CO ₂ eq/m ²)* | A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)* |
|---|------------------|-----------------------------|--------------------------|---------------------------------|------------------|--|--|---|
|  A24 | 600 x 600 x 25 | 3.4 | 50 / 100 | Rockfon® System T24 A | 38% | Silver | 3.65 | 4.62 |
| | 1200 x 600 x 25 | | 50 / 100 | Rockfon® System T24 A | | | | |
|  E15 | 1200 x 600 x 25 | 3.4 | 60 / 100 | Rockfon® System T15 E | 38% | Silver | 3.65 | 4.62 |
| | 600 x 600 x 25 | | 60 / 100 | Rockfon® System T15 E | | | | |
|  E24 | 1200 x 600 x 25 | 3.4 | 60 / 100 | Rockfon® System T24 E | 38% | Silver | 3.65 | 4.62 |
| | 600 x 600 x 25 | | 60 / 100 | Rockfon® System T24 E | | | | |

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.80 (Class B)




Direct Sound Insulation
 R_w = 19 dB



Room to room sound insulation
 $D_{n,f,w}$ = 35 dB
 $D_{n,f,w}$ with Rockfon Acoustimass = 45* dB
 $D_{n,f,w}$ with Rockfon Soundstop 30 dB = 50* dB

The sound insulation properties (R_w , $D_{n,f,w}$) presented in the datasheet represent A-edge tiles.

*) Values obtained on the basis of theoretical analysis.

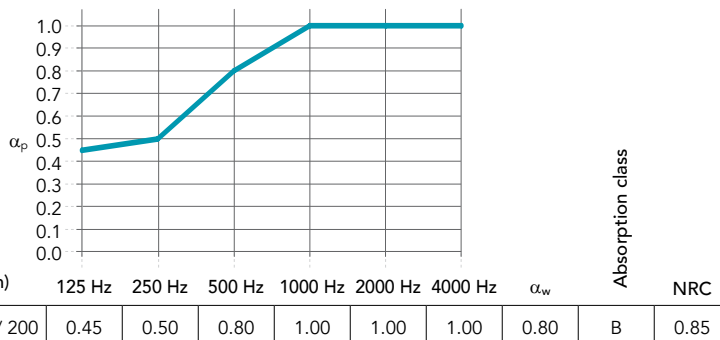

Reaction to fire
 A2-s1,d0



Light reflection
 87% light reflection
 >99% light diffusion



Visual appearance
 Super white surface
 L value: 94.5
 The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).
 Deep matt surface, perfect in critical side-light
 Gloss: 0.8 gloss unit at 85° angle
 The gloss of the product is tested in accordance with ISO 2813.



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms



Surface durability
 Enhanced durability and dirt resistance.
 Wet-scrub resistance: Class 4

The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

04.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

