

DATASHEET

## Rockfon Eclipse® wall panel



**Sounds Beautiful**

# Rockfon Eclipse® wall panel

- Aesthetic, frameless acoustic wall panel suitable for offices, reception areas etc. where extra sound absorption combined with good design is required
- A smooth, deep matt and super white surface providing high light reflection, light diffusion and anti-static properties, extending its product lifetime
- Available in a variety of shaped formats with a clean minimalist A-edge and an unlimited custom colour range using NCS
- Quick and easy to install with the special wall fixing kit. The fixing kits allow for the panel to be installed in different distances from the wall creating interesting patterns

## Product Description

- Stone wool panel
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: white backing fleece
- Durable painted edges

## Application Areas

- Office
- Leisure
- Retail

Edge detail	Shapes	Module size (mm)	Weight (kg/unit)	MS / MS easy access (mm)	Recommended installation System
A	Square	1160 x 1160 x 40	9	55 / 105	Rockfon® System Eclipse Wall™
	Rectangle		13	55 / 105	Rockfon® System Eclipse Wall™
			17	55 / 105	Rockfon® System Eclipse Wall™
	Circle		3	55 / 105	Rockfon® System Eclipse Wall™
			7	55 / 105	Rockfon® System Eclipse Wall™
	Triangle		4	55 / 105	Rockfon® System Eclipse Wall™
	Hexagon		6	55 / 105	Rockfon® System Eclipse Wall™
	Oval		10	55 / 105	Rockfon® System Eclipse Wall™
	Bespoke	1760 x 1160 x 40	9	55 / 105	Rockfon® System Eclipse Wall™

MS = Minimum construction depth.

Rectangle 2360X1160 mm can only be mounted horizontally by its longest sides and the Triangle with a peak facing downwards.

Contact us for the installation of freeform Rockfon Eclipse.

Free-form sizes bigger than 2400 length or 1200 width will be produced as two halves.

Contact us for special shapes, colours, sizes, lead times and minimum quantities.




## Performance



### Sound absorption

$A_{eq}$  ( $m^2$ /item)

Further acoustic data available;  
contact your local Rockfon  
technical support

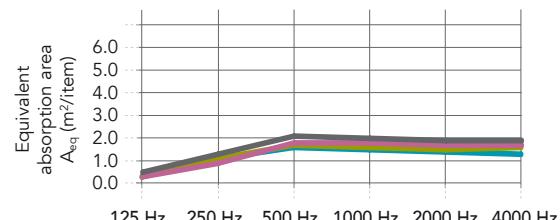

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Circle 1160mm, Direct Fixing Bracket (15 mm)	0.3	1.1	1.6	1.5	1.4	1.3
Circle 1160mm, Stepped Fixing Bracket (65 mm)	0.3	1.1	1.7	1.6	1.5	1.6
Square 1160x1160mm, Direct Fixing Bracket (15 mm)	0.3	0.9	1.8	1.8	1.7	1.7
Square 1160x1160mm, Stepped Fixing Bracket (65 mm)	0.5	1.3	2.1	2.0	1.9	1.9



### Reaction to fire

A1

Rockfon Eclipse Rectangle 2360: A2-s1,d0



### Environment

Fully recyclable stone wool

The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.

Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



### Light reflection and light diffusion

87% light reflection (rear side: 79%)  
>99% light diffusion



### Humidity and sag resistance

Up to 90% RH

Rockfon Eclipse is not suitable for use in swimming pools or outdoors.

For more information, please contact Rockfon.



### Carbon footprint

Cradle-to-Gate 6.13 kg of CO<sub>2</sub> eq. (based on third party verified EPD)

Cradle-to-Grave 8.30 kg of CO<sub>2</sub> eq. (based on third party verified EPD)



### Cleaning

- Vacuum
- Damp cloth



### Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



### Hygiene

Stone wool provides no sustenance to microorganisms



### Surface durability

Enhanced durability and dirt resistance.



### Visual appearance

Super white surface

L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light

Gloss: 0.8 gloss unit at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



# Sounds Beautiful

