

Rockfon MediCare® Plus



Rockfon MediCare® Plus






- For demanding healthcare applications requiring cleaning with damp cloth using standard detergents and specialist dry steam cleaning (compliant with HBN 00-10 and NSHC)
- Does not contribute to the growth of MRSA, low particle emission (ISO Class 3)
- Fulfills sound absorption criteria for healthcare environments (compliant with HTM 08-01) and highest Reaction to fire (Class A1)
- Full range of formats in concealed, semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted, water repellent fleece
- Rear side: back fleece
- Sealed edges

Application Areas

- Healthcare

Edges	Module size (mm)	Weight (kg/m ²)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
	1200 x 600 x 20	2.3	50 / 100	Rockfon® System T24 A	37%	Bronze	2.24	2.8
			50 / 100	Rockfon® System T24 A				
	600 x 600 x 20		50 / 100	Rockfon® System T24 A				
			50 / 100	Rockfon® System XL T24 A				
	1200 x 600 x 20		50 / 100	Rockfon® System T24 A, E ECR				
			50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
	600 x 600 x 20		50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
			50 / 100	Rockfon® System T24 A, E ECR				
	1800 x 600 x 20		50 / 100	Rockfon® System T24 A				
			50 / 100	Rockfon® System XL T24 A				
			50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
			50 / 100	Rockfon® System T24 A, E ECR				
	2100 x 600 x 25	2.7	50 / 100	Rockfon® System T24 A	37%	Bronze	2.77	3.49
			50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
			50 / 100	Rockfon® System T24 A, E ECR				
	2400 x 600 x 25		50 / 100	Rockfon® System T24 A				
			50 / 100	Rockfon® System MediCare T24 A, E (ECR)				
			50 / 100	Rockfon® System T24 A, E ECR				
	600 x 600 x 20	2.8	60 / 100	Rockfon® System T24 E	37%	Bronze	2.97	3.77
			60 / 100	Rockfon® System T24 A, E ECR				
	600 x 600 x 22	3.7	31 / 31	Rockfon® System T24 X	37%	Bronze	3.19	4.05
			31 / 31	Rockfon® System T24 X DLC				

MS = Minimum Suspension


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1.00 (Class A)

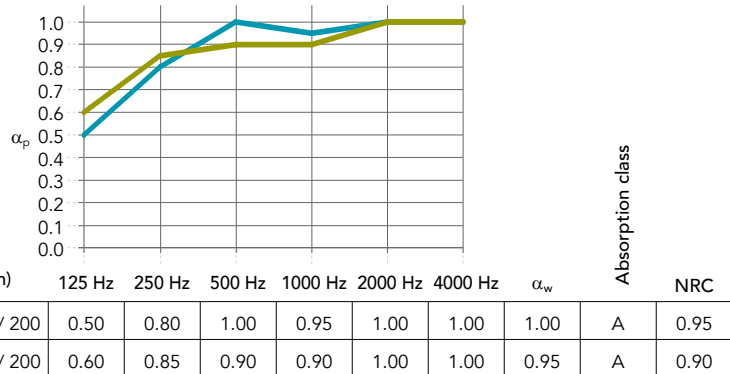

Reaction to fire
 A1



Fire Resistance
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon MediCare Plus can be used with various Chicago Metallic grids and Rockfon systems to create a 30 and/or 60 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection
 85%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine, quaternary ammonium and hydrogen peroxide.



Surface durability
 Enhanced durability and dirt resistance.



Hygiene
 Stone wool provides no sustenance to microorganisms. Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:

- Methicillin Resistant Staphylococcus Aureus (MRSA)
- Candida Albicans
- Aspergillus Brasiliensis

The bactericidal and fungicidal effect of dry steam cleaning meets the requirements of NF EN 14561 (> 5 log10) and NF EN 14562 (> 4 log10), meaning the disinfection is very effective.



Clean room
 ISO Class 3



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Sounds Beautiful

