

# Rockfon® CleanSpace Air



# Rockfon® CleanSpace Air



- A high-quality, smooth white acoustic ceiling tile
- Rockfon CleanSpace Air is designed for use in pressurised healthcare environments and where differential air pressure is required
- Does not contribute to the growth of MRSA, low particle emission (ISO Class 3)
- Fulfilling the requirements of Zone 4 (very high risk). Microbiological class M1
- Allows for rigorous cleaning with standard detergents and effectively disinfected by dry steam cleaning
- Class B sound absorption (25 mm) and Class A for 40 mm and highest fire safety (Class A1)

## Product Description


- Stone wool tile
- Visible side: micro-textured white painted, water repellent fleece
- Rear side: airtight high performance membrane
- Sealed edges

## Application Areas

- Healthcare
- Industry

Edges	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A24	600 x 600 x 25	2.7	50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)	37%	Bronze	2.9	3.64
	600 x 600 x 40	4.0	50 / 200	Rockfon® System CleanSpace T24 A, E (ECR)			4.18	5.35


\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](https://rockfon.link/uk-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.

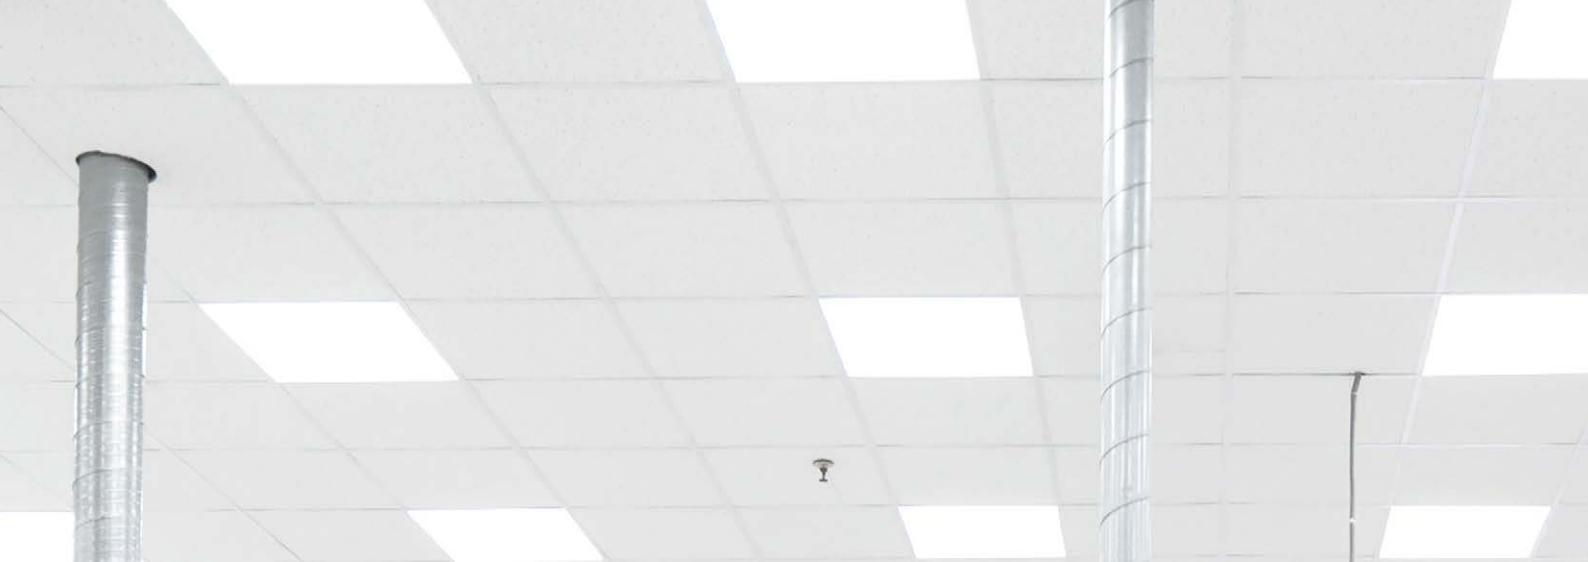

## Performance



**Sound absorption**  
 $\alpha_w$ : up to 1.00 (Class A)

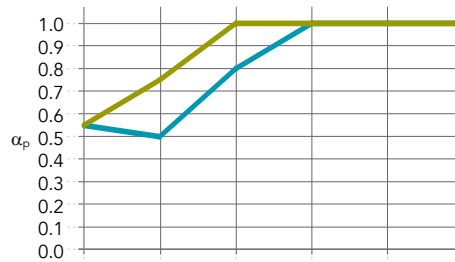

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption class	NRC
25 / 200	0.55	0.50	0.80	1.00	1.00	1.00	0.80	B	0.85
40 / 200	0.55	0.75	1.00	1.00	1.00	1.00	1.00	A	1.00



**Reaction to fire**  
 A1



**Clean room**  
 ISO Class 3



**Light reflection**  
 85%



**Air Pressure**  
 Suitable in areas where differential pressure is required. When used in combination with closed neoprene foam tape and:  
 -HDC 2 for the 25 mm tile;  
 the air leakage rate of less than 0.5m<sup>3</sup>/h/ m<sup>2</sup>/Pa under a pressure range of 5 to 40 Pa is achieved. The amount of hold down clips (HDC) depends on the tile dimensions and the room size/shape. For more information please contact customer service.



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Recyclability**  
 Fully recyclable stone wool



**Cleaning**

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (2x Weekly disinfection):
  - Active chlorine 2,6%
  - Quaternary ammonium 0,25%
  - Hydrogen peroxide 5%
  - Ethanol 70%
  - Isopropanol 70%
- Use only soft equipment directly on the tile surface: cloth or sponge. Avoid scraping or stiff brush rubbing.



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Hygiene**  
 Stone wool provides no sustenance to microorganisms  
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:  
 - Methicillin Resistant Staphylococcus Aureus (MRSA)  
 - Candida Albicans  
 - Aspergillus Brasiliensis  
 The bactericidal and fungicidal effect of dry steam cleaning meets the requirements of NF EN 14561 (> 5 log10) and NF EN 14562 (> 4 log10), meaning the disinfection is very effective.



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

04.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

