

Rockfon Sonar® dB 35



Rockfon Sonar® dB 35





- Combines room-to-room sound insulation as well as good sound absorption for a flexible office layout where confidentiality is not an issue
- Made from a 25mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room-to-room
- Basic range of dimensions in semi-concealed and visible grid options
- Light weight sound insulating tile, easy to install/cut and clean with a vacuum or damp cloth

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

Application Areas

- Office
- Healthcare
- Education

Edges	Module size (mm)	Weight (kg/m ²)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 25	3.4	50 / 100	Rockfon® System T24 A	39%	Silver	3.75	4.73
	1200 x 600 x 25		50 / 100	Rockfon® System T24 A				
 E15	600 x 600 x 25	3.4	60 / 100	Rockfon® System T15 E	39%	Silver	3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T15 E				
 E24	600 x 600 x 25	3.4	60 / 100	Rockfon® System T24 E	39%	Silver	3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T24 E				

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance




Sound absorption
 α_w : 0.80 (Class B)



Direct Sound Insulation
 R_w = 19 dB



Room to room sound insulation
 $D_{n,f,w}$ = 35 dB
 $D_{n,f,w}$ with Rockfon Acoustimass = 45* dB
 $D_{n,f,w}$ with Rockfon Soundstop 30 dB = 50* dB

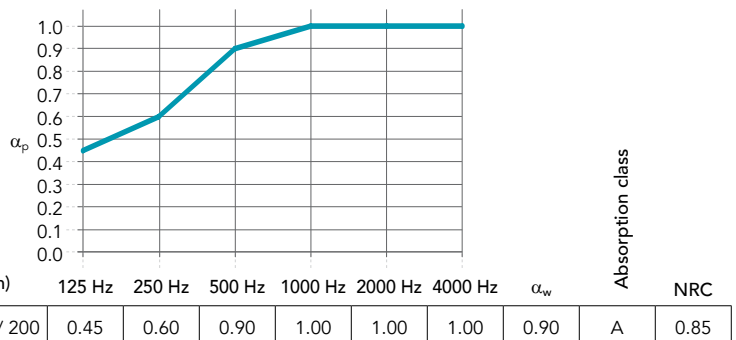

The sound insulation properties (R_w , $D_{n,f,w}$) presented in the datasheet represent A-edge tiles.
 *) Values obtained on the basis of theoretical analysis.



Reaction to fire
 A1



Fire Resistance
 30-60 mins*
 *Subject to edge details, module sizes, grid and hold down clips. Contact our Technical team for more information.



Light reflection
 85%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum
 - Damp cloth
 - Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



Hygiene
 Stone wool provides no sustenance to microorganisms



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

04.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

